

TARALAY IMPRESSION

gerflor.com







TARALAY IMPRESSION



16.6 cm

0373 - Noma Ice



20 cm

0723 - Charme Pecan



No strip
Continuous
design

0719 - Infinity Lichen



No strip
Continuous
design

0068 - Renzo Pecan



No strip
Continuous
design

0025 - Renzo Taupe



No strip
Continuous
design

0726 - Sycamore Dark



0519 - Noma Beige



No strip
Continuous
design

0680 - Infinity Greige



No strip
Continuous
design

0725 - Sycamore Light Brown



16.6 cm

0773 - Portobello



11.2 cm
14.2 cm
8.7 cm
6.4 cm

0734 - Loft Chestnut



16.6 cm

0371 - Noma Rustic



10 cm

1314 - Walnut Brown

TARALAY IMPRESSION



16.6 cm

0538 - Habana Vinales



16.6 cm

0722 - Herringbone Blond



16.6 cm

0522 - Habana Trinidad



16.6 cm

0724 - Herringbone Chatain




20 cm


0721 - Charme Natural



0528 - Walnut Cream




0720 - Infinity Aube



0727 - Sycamore Vanilla



0760 - Moon Island



0671 - Loft Light Brown

TARALAY IMPRESSION



0845 - Leather Greige

NEW



0769 - Mohair White



0523 - Cemento Genova



0543 - Cemento Brescia



0843 - Leather Grey

NEW



0524 - Cemento Capri



0766 - Mohair Dark



0525 - Cemento Modena



0767 - Mohair Natural




0770 - Gentlemen Clear



0771 - Gentlemen Grey



0772 - Gentlemen Coffee

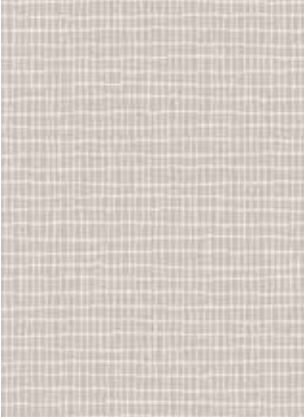


0774 - Trame Clear



0776 - Trame Beige



0777 - Trame Rose

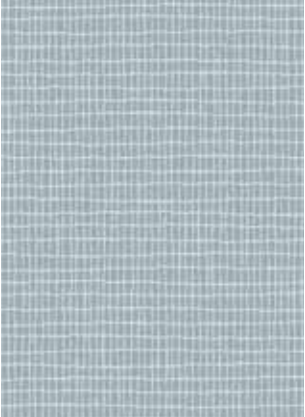

0775 - Trame Blue



0730 - **Corner** Light Beige




0756 - **Kubes** Beige



0833 - **Uni Matt** Beige

NEW

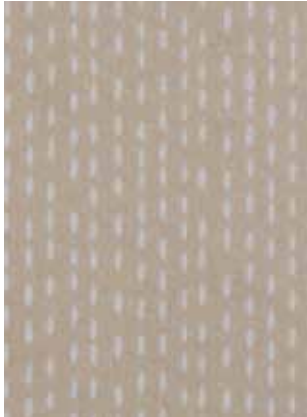

0736 - **Rice** Champagne



0728 - **Corner** Offwhite



0848 - **Uni Matt** White

NEW



0755 - **Kubes** White



0763 - **Rice** Greige



0745 - **Nest** Metal



0737 - **Rice** Souris




0832 - **Uni Matt** Grey


NEW



0729 - **Corner** Metal

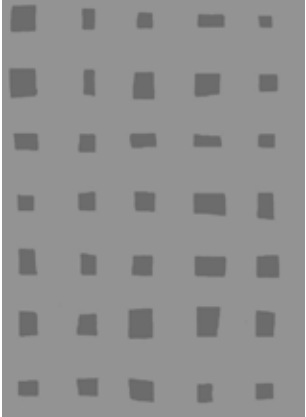

0753 - **Kubes** Grey

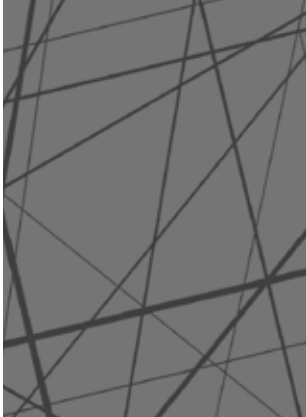

0746 - **Nest** Black



0831 - **Uni Matt** Anthracite

NEW



0744 - **Stars** Anthracite

TARALAY IMPRESSION




0762 - Rice Brown




0834 - Uni Matt Brown

NEW

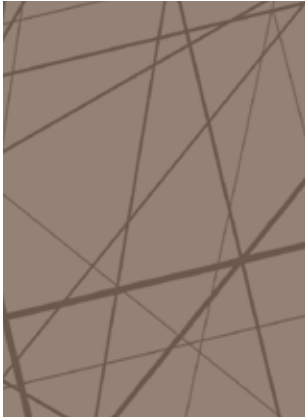

0765 - Nest Taupe

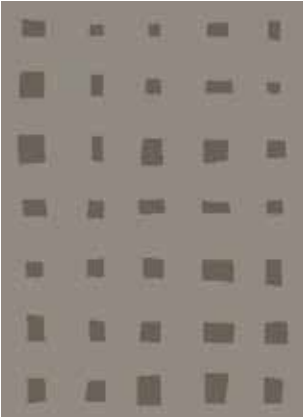

0751 - Kubes Taupe




0741 - Corner Tomette



0836 - Uni Matt Tomette


NEW

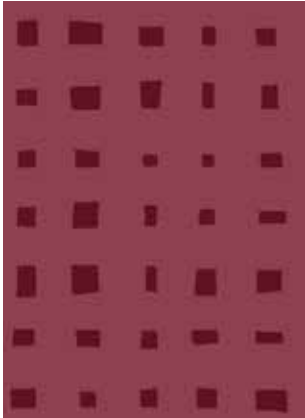


0748 - Kubes Burgundy




0757 - Rice Coquelicot

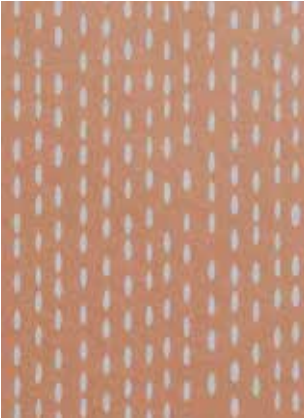

0738 - Rice Copper

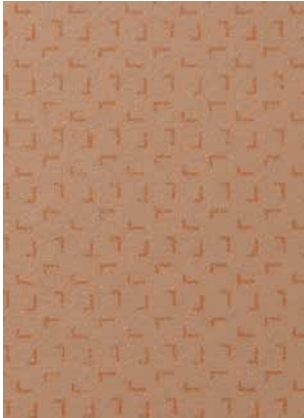

0733 - Corner Copper

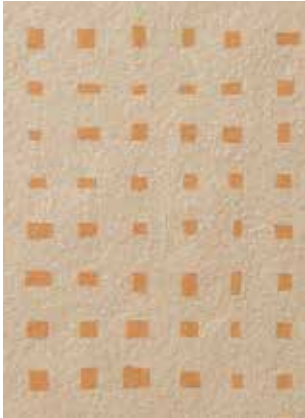

0752 - Kubes Gold



0759 - Rice Mustard



0849 - Uni Matt Sun

NEW



0750 - Kubes Sun



0835 - Uni Matt Orange

NEW



0764 - Stars Orange



0739 - **Corner** Anis



0840 - **Uni Matt** Anis

NEW



0735 - **Rice** Light Green



0839 - **Uni Matt** Turquoise

NEW



0740 - **Corner** Turquoise



0747 - **Kubes** Olive



0842 - **Uni Matt** Olive

NEW



0758 - **Rice** Sea



0749 - **Kubes** Sky



0743 - **Stars** Baltique



0844 - **Leather** Marine

NEW



0754 - **Kubes** Blue



0837 - **Uni Matt** Blue

NEW



0732 - **Corner** Dark Blue



0838 - **Uni Matt** Dark Blue

NEW

TARALAY IMPRESSION

gerflor.com

TARALAY IMPRESSION			
COMPACT		COMFORT	
Wood, Cemento, Mohair, Nest, Stars, Gentlemen, Trame, Corner, Kubes, Rice, Leather, Uni Matt		Wood, Cemento, Mohair, Nest, Stars, Gentlemen, Trame, Corner, Kubes, Rice, Leather, Uni Matt	

DESCRIPTION

Total thickness	EN ISO 24346 [EN 428]	mm	2.00	3.35
	ASTM F386-02	inch	0.08	0.13
Thickness of wearlayer	EN ISO 24340 [EN 429]	mm	0.70	0.65
	ASTM F410-02	inch	0.028	0.026
Weight	EN ISO 23997 [EN 430]	g/sq.m	2635	2825
	-	lbs/sq.ft	-	-
Width/length of sheet	EN ISO 24341 [EN 426]	cm / lm	200 / 25	200 / 25
	-	feet - inch	6'6" / 82"	6'6" / 82"

CLASSIFICATION

Norm/product specification	-	-	EN ISO 10582 [EN 649]	EN 651
European classification	EN ISO 10874 [EN 685]	class	34 - 43	34 - 42
Fire rating	EN 13 501-1	class	Bfl-s1	Bfl-s1
Static electrical propensity	EN 1815	kV	< 2	< 2
Slip resistance wet: ramp test with oil ⁽¹⁾	DIN 51 130	class	R10	R10

PERFORMANCES

Wear resistance	EN 660.2	mm ³	≤ 2.0	≤ 2.0
Wear group	NF 189	group	T	T
Type binder content	EN ISO 10582	Type	I	-
Dimensional stability	EN ISO 23999 [EN 434]	%	≤ 0.40	≤ 0.40
Residual indentation (requirement)	EN ISO 24343-1 [EN 433]	mm	≤ 0.10	≤ 0.20
Residual indentation (average measured value)	-	mm	≈ 0.03	≈ 0.08
Impact sound insulation	EN ISO 717-2	dB	8	19
Castor chair test (type W)	ISO 4918 [EN 425]	-	OK	OK
Thermal conductivity	EN ISO 10456 [EN 12524]	W/(m.K)	0.25	0.25
Colour fastness	EN 20 105 - B02	degree	≥ 6	≥ 6
Surface treatment	-	-	Protecsol® 2	Protecsol® 2
Chemical products resistance ⁽²⁾	EN ISO 26987 [EN 423]	-	OK	OK
Anti-bacterial activity [E. coli - S. aureus - MRSA] ⁽³⁾	ISO 22196	-	> 99% inhibits growth	> 99% inhibits growth

ENVIRONMENT / INDOOR QUALITY AIR

TVOC after 28 days	ISO 16000-6	µg/m ³	< 10	< 10
Certification	-	-	Floorscore®	Floorscore®

CE marking

	EN 14041	-		
		-		

(1) For lifetime sustainable wet resistance, please refer to Tarasafe ranges.
(2) Regarding the resistance to chemicals, please download the corresponding leaflet from our website.
(3) The implementation of an effective cleaning regime is the most important defence against infection.

Product description and technical data sheet available in various languages. See our Gerflor Country websites.

Technical data sheets and product descriptions for **TARALAY IMPRESSION COMPACT and COMFORT PLUS** (0.9mm wearlayer) available in the Taralay Impression product guide.

Installation and Maintenance Guidelines, Complementary ranges available on our Gerflor website.

 Rubber leaves indelible stains on vinyl floorings: do not use mats with rubber backing and replace tubular furniture feet with those made of PVC or polyamide. Place mats of sufficient length at entrances to reduce outside sources of dirt.

IMPORTANT: The information contained in this document is valid from 01/10/2018 and is subject to change at any time without notice. In the context of constantly changing technology, our customers are responsible, prior to any use, for checking with us that this document is the version in force.

TARALAY IMPRESSION, ACTIONS SPEAK LOUDER THAN WORDS



COMPOSITION
100 % REACH



RECYCLABILITY
100 %



INDOOR AIR QUALITY
100 times lower than norm requirements (TVOC < 10 µg/m³ after 28 days)



LCA
Eco-designed according to a product-specific life cycle analysis



WELLNESS
Anti slip R10
Comfort version: Walking comfort < 65 dB (best certification) and impact sound insulation - 19 dB



Be connected!



#Gerflor



www.gerflor.com

Gerflor
theflooringgroup